



- ❖ Drinking Fountains and Water Bottle Refill Stations
- ❖ Auto Water Boiler/Chiller Units
- ❖ Outdoor Showers and Boot Wash Stations
- ❖ Dual Jet Hand Dryers
- ❖ Water Filtration/Purification Systems
- ❖ Laboratory Equipment
- ❖ Water Test Chemicals and Supplies
- ❖ Instrument Service and Repair Facilities

THE ORIGINAL

UNDERSINK WATER BOILER

THE NEW GENERATION IN BOILING WATER TECHNOLOGY

IDEAL FOR TEA, COFFEE!!!

- The unit is located under the sink
- The copper body comprises a storage tank and an expansion chamber.
- Element controls temperature and boil dry protection.
- Solid brass, rapid action, 1/4 turn lever tap handle or spring loaded tap handle.
- Solid brass swivel bi-flo spout.
- AS 3500 spill tray not required up to seven litres.
- No expensive pumps, solenoid valves or drainage required.
- A 350 KPA pressure limiting valve must be fitted for maximum efficiency in all areas.
- **RECOMMENDED:**
- A twin filter system to be fitted to all units
- **OPTIONAL:**
- Remote controlled boiling water safety cut off system
- **TYPICAL INSTALLATION:**
- Electrical Approval No: Q0S1101 **WATERMARK APPROVED**



Model No	Capacity Litres	No. of Cups	Cup/Hr Recovery	Rating Kw	Height mm	Width Mm	Depth mm
ABU2.5T	2.5	15-20	110	2.4	325	245	290
ABU5T	5	30-40	110	2.4	480	245	290

Specifications are subject to change without notice

AquaGo ChemChek Group

Phone NZ +64 9 275 5019 | E: sales@aquago-chemchek.com | Australia 1800-218-662
www.aquago-chemchek.com or www.aquagowater.co.nz or www.aquago.com.au

THE ORIGINAL

UNDERSINK BOILING WATER UNIT

BOILING WATER IDEAL FOR TEA, COFFEE!

- The unit is located under the sink.
- The copper body comprises a storage tank and an expansion chamber.
- Element controls temperature with built in computer.
- Solid brass, rapid action, 1/4 turn lever tap handle or spring loaded tap handle.
- Solid brass swivel bi-flo spout.
- No expensive pumps, solenoid valves or drainage required.

A 350 kpa pressure limiting valve must be fitted for maximum efficiency (for pressure above 600kpa)


We recommend a filter system to be fitted to all units

OPTIONAL:

- 4,8, & 6kw for TD5 only
- Safety Package
- Anti-leak device



35 Φ
Mounting Hole

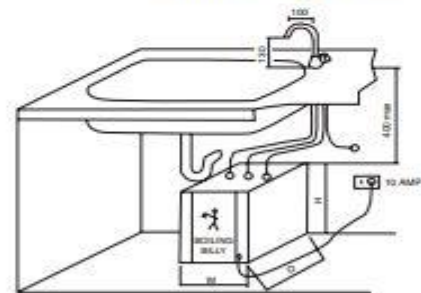

SPECIFICATIONS

ONE CUP (200ML CUPS)

BOILING BILLY UNDERSINK SERIES	Model No.	Capacity Litres	No. Of Cups	Cup/Hr Recovery	Rating Kw	Height mm	Width mm	Depth mm
	TD 1.25	1.25	10-13	90	1.8	335	180	150
	TD 2.5	2.5	15-20	110	2.4	325	245	290
	TD 5	5	30-40	110	2.4	480	245	290

Specifications are subject to change without notice.